



## Dimensions

### SDL Series

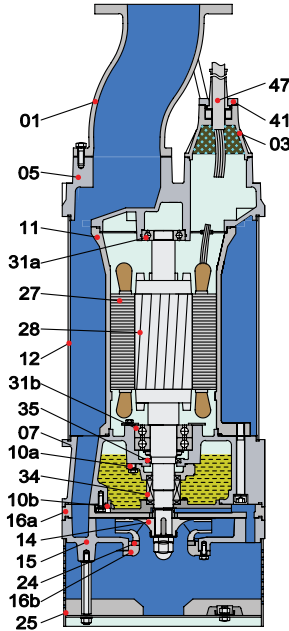

SH22-75kW

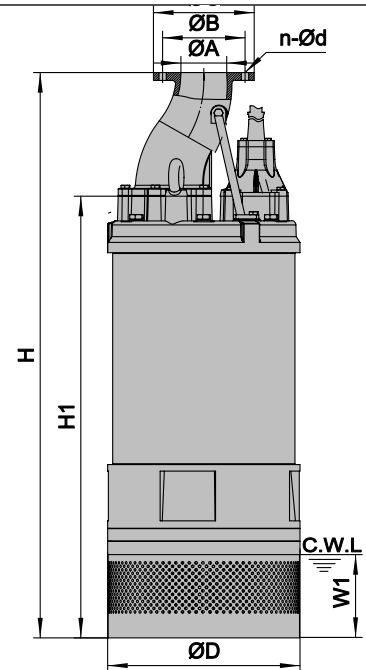

C.W.L:Continuous running water level

Item No.	Part Name	Material	Item No.	Part Name	Material
01	Hose coupling	Ductile Iron	16b	Inlet Plate	Cast Iron
03	Terminal Box	Cast Iron	24	Neck Ring	High Chrome Alloy
05	Upper Cover	Cast Iron	25	Strainer	AISI201SS
07	Bearing House	Cast Iron	27	Stator	
10a	Seal Bracket	Cast Iron	28	Rotor	Shaft: AISI420SS
10b	Seal Bracket	Cast Iron	31a	Bearing	Ball Bearing
11	Motor Body	Cast Iron	31b	Bearing	Ball Bearing
12	Outer Casing	Steel	34	Mechanical Seal	T0-Sic/Sic-Sic
14	Impeller	High Chrome Alloy	35	Oil Seal	
15	Diffuser	Ductile Iron	41	Shim	Cast Iron
16	Inlet Plate	Ductile Iron	47	Cable	

Model (50/60Hz)	A	B	C	n-Ød	D	H	H1	W1	N.W	G.W	Packing Dimension mm
	mm	mm	mm	mm	mm	mm	mm	mm	Kg	Kg	
SDL-100-52-22T2-C	100	180	220	8-Ø17.5	420	1374	1072	240	370	410	1495x490x705
SDL-100-52-30T2-C	100	180	220	8-Ø17.5	420	1374	1072	240	375	415	1495x490x705
SDL-150-52-22T2-C	150	240	285	8-Ø22	420	1434	1082	250	385	425	1565x490x705
SDL-150-52-30T2-C	150	240	285	8-Ø22	420	1434	1082	250	390	430	1565x490x705
SDL-150-52-37T2-C	150	240	285	8-Ø22	530	1424	1072	180	570	615	1605x600x860
SDL-150-52-45T2-C	150	240	285	8-Ø22	530	1424	1072	180	575	620	1605x600x860
SDL-200-52-37T2-C	200	295	340	12-Ø22	530	1474	1072	180	575	625	1605x600x860
SDL-200-52-45T2-C	200	295	340	12-Ø22	530	1474	1072	180	580	630	1605x600x860
SDL-150-52-55T2-C	150	240	285	8-Ø22	550	1630	1280	200	840	890	1815x620x920
SDL-150-52-75T2-C	150	240	285	8-Ø22	550	1630	1280	200	888	938	1815x620x920
SDL-200-52-55T2-C	200	295	340	12-Ø22	550	1680	1280	200	850	900	1815x620x920
SDL-200-52-75T2-C	200	295	340	12-Ø22	550	1680	1280	200	898	948	1815x620x920
SDL-150-52-90T2-C	150	250	300	8-Ø22	592	1687	1282	200	1110	1166	1825x665x965
SDL-200-52-90T2-C	200	295	340	12-Ø22	592	1687	1282	200	1120	1176	1825x665x965
SDL-200-52-110T2-C	200	295	340	12-Ø22	592	1687	1282	200	1150	1206	1825x665x965

AQUA00011

Exclusively Distributed by