




Performance Curves

SDE Series

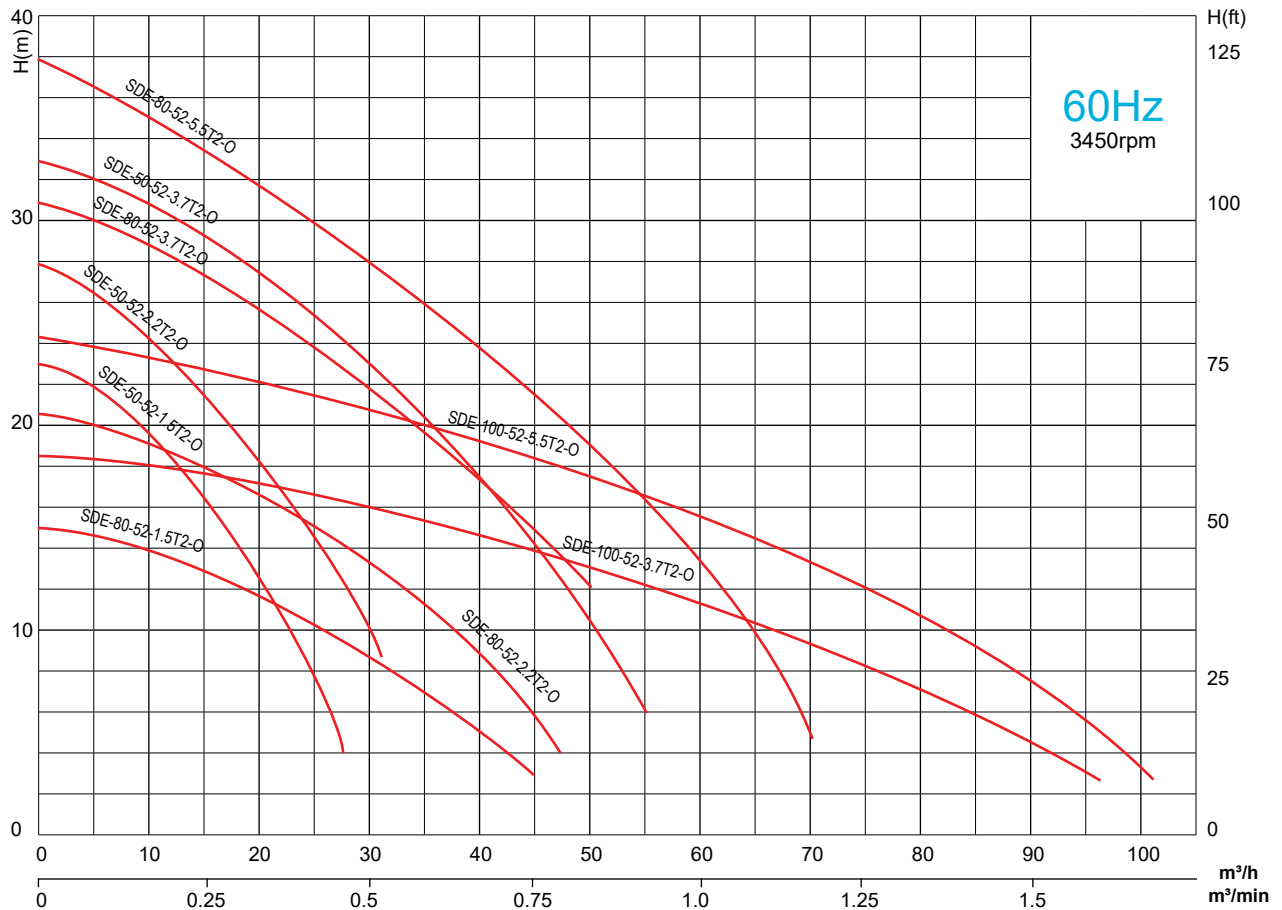

Model (60Hz)	Outlet mm	Motor Power		Rated Current (380V) A	Rated Capacity		Rated Head m	Max Capacity		Max Head m	Impeller Passage mm
		kW	HP		m³/h	m³/min		m³/h	m³/min		
SDE-50-52-1.5T2-O	50	1.5	2	3.5	15	0.25	16.5	27	0.45	23	8.5
SDE-80-52-1.5T2-O	80	1.5	2	3.5	30	0.50	9	45	0.75	15	8.5
SDE-50-52-2.2T2-O	50	2.2	3	5.1	18	0.30	20	31	0.52	28	8.5
SDE-80-52-2.2T2-O	80	2.2	3	5.1	30	0.60	13	47	0.78	20.5	8.5
SDE-50-52-3.7T2-O	50	3.7	5	8.0	12	0.20	30	50	0.83	33	8.5
SDE-80-52-3.7T2-O	80	3.7	5	8.0	30	0.50	22	55	0.92	31	8.5
SDE-100-52-3.7T2-O	100	3.7	5	8.0	60	1.0	11.5	96	1.60	18.5	8.5
SDE-80-52-5.5T2-O	80	5.5	7.5	11.6	36	0.60	25	69	1.15	38	8.5
SDE-100-52-5.5T2-O	100	5.5	7.5	11.6	60	1.0	16	102	1.70	24.4	8.5

AQUA0001

Exclusively Distributed by

• mtp.com.au • sales@mtp.com.au • 1800 733 687

