



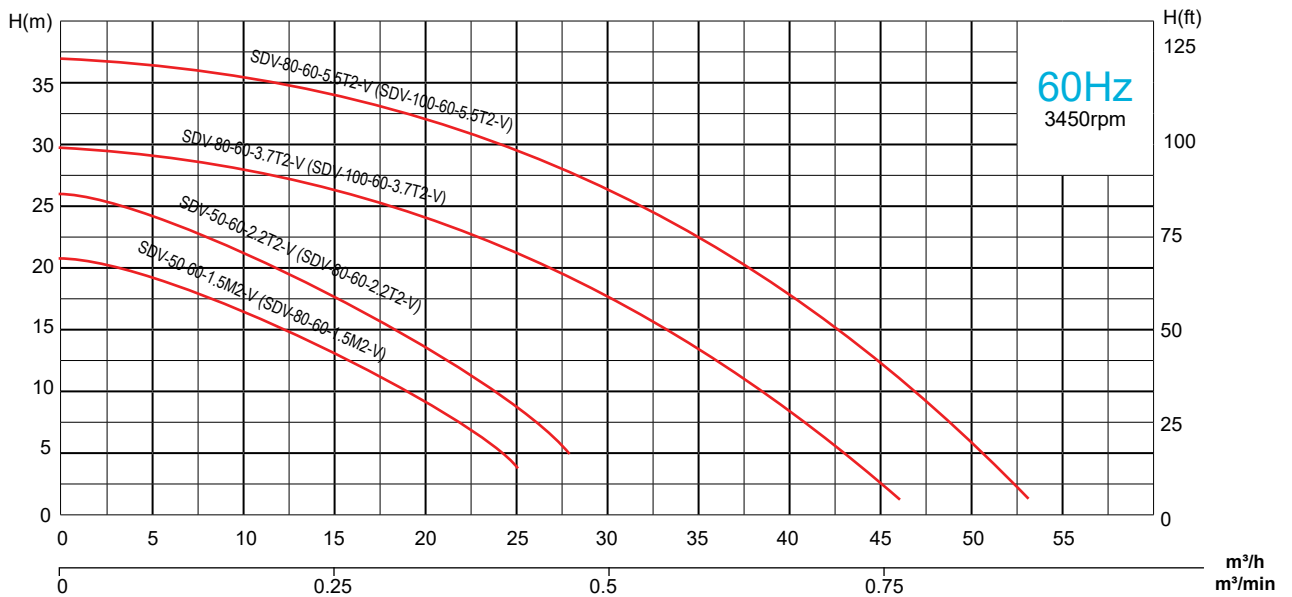

Performance Curves

SDV Series

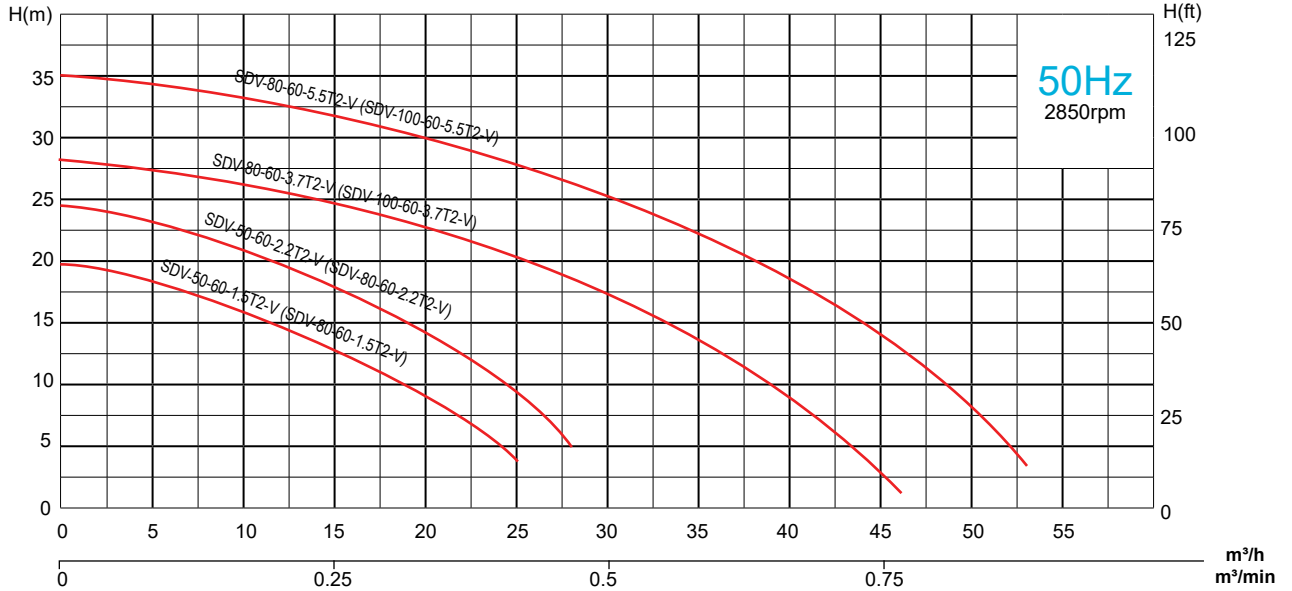

Model (50/60Hz)	Outlet	Motor Power		Voltage	Rated Current	Rated Capacity		Rated Head	Max Capacity		Max Head	Impeller Passage
	mm	kW	HP	V	A	m³/h	m³/min	m	m³/h	m³/min	m	mm
SDV-50-60-1.5M2-V	50	1.5	2	230	10	12	0.20	15	25	0.42	20/21	8.5
SDV-80-60-1.5M2-V	80	1.5	2	230	10	12	0.20	15	29	0.48	20/21	8.5
SDV-50-60-1.5T2-V	50	1.5	2	400	3.5	12	0.20	15	25	0.42	20/21	8.5
SDV-80-60-1.5T2-V	80	1.5	2	400	3.5	12	0.20	15	29	0.48	20/21	8.5
SDV-50-60-2.2T2-V	50	2.2	3	400	5.0	12	0.20	20	28	0.47	24/26	8.5
SDV-80-60-2.2T2-V	80	2.2	3	400	5.0	12	0.20	20	32	0.53	24/26	8.5
SDV-80-60-3.7T2-V	80	3.7	5	400	8.1	30	0.50	18	46	0.77	28/30	8.5
SDV-100-60-3.7T2-V	100	3.7	5	400	8.1	30	0.50	18	46	0.77	28/30	8.5
SDV-80-60-5.5T2-V	80	5.5	7.5	400	11.2	36	0.60	22	54	0.9	35/37	8.5
SDV-100-60-5.5T2-V	100	5.5	7.5	400	11.2	36	0.60	22	54	0.9	35/37	8.5

AQUA0002

Exclusively Distributed by

• mtp.com.au • sales@mtp.com.au • 1800 733 687

